GRABO
1905

MURAVYL

HIGH PERFORMANCE FLEXIBLE WALL COVERING

PERFORMANCE, FEATURES & BENEFITS

- 2 m width
- Excellent fire resistance
- Dimensionally stable
- Anti-bacterial
- Antistatic

RECOMMENDED USAGE

- Education
- Healthcare
- Retail
- Hospitality
- Offices

TOTAL THICKNESS **1.5 mm**

TOTAL WEIGHT **1.4 kg/m²**

WIDTH OF ROLL **2 m**


FIRE RESISTANCE **B-S2, d0**

GRABO SAN
MINIMIZE THE GROWTH OF MICROORGANISMS

DESCRIPTION		MURAVYL
Construction	heterogeneous wall covering	
Total thickness	EN ISO 24346	1.5 mm
Wear layer thickness	EN ISO 24340	0.65 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	25 lm
Total weight	EN ISO 23997	1.4 kg/m²
CLASSIFICATION		
Product specification	EN ISO 11638	✓
Residual indention	ISO 24343-1	max. 0.2 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
Light fastness	ISO 105-B02	grade 6
PERFORMANCE		
Abrasion group	EN 660-2	T
Fire resistance	EN 13501-1	class: B-s2, d0
Chemical resistance	EN ISO 26987	✓
Anti bacterial and fungicid treatment		graboSAN
Seaming method		hot or cold welding

CONSTRUCTION

- Wear layer
- Glass fibre reinforcement
- Back layer

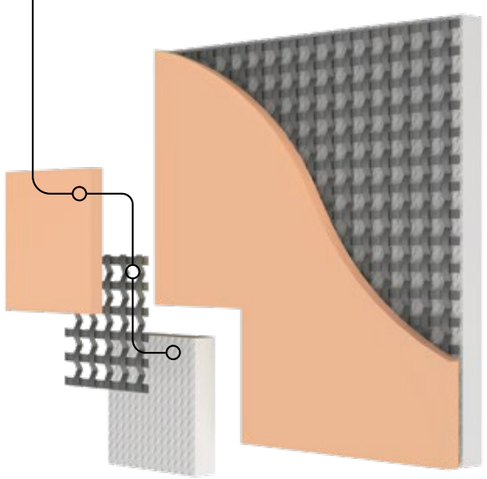



1001


1217


1220

6030


6001


6027


6036

1147


7223


7042


4017


3060


3152

3119

2026

2002